

Quality of Service

Overview

- network impairments and congestion
- current status
- measurements

(Loosely based on Brian Carpenter's slides)

Fundamental Limits

- Shannon channel capacity with Gaussian noise for error-free transmission:
 $C = B \log_2(1 + S/N)$, with spectral bandwidth B ; e.g., for telephone modem,
 $B = 3000$ Hz, $S/N = 35$ dB; thus $C = 34.8$ kb/s.
- imperfect detection of symbols with noise \rightarrow bit errors
- bit error rate (BER) from 10^{-12} for fiber to 10^{-2} for deep space ...
- packet communications creates bit error multiplier effect: one bit error kills a packet
- bit errors not generally a problem except for wireless
- fundamental trade-off: delay \leftrightarrow loss: in channel with bit errors, can only get perfect channel with infinite delay
- compensate for packet errors by forward error correction (redundancy) or retransmission (TCP)

Congestion

- competition for the same packet transmission
- need perfect coordination or infinite buffers or combinations
- congestion is unavoidable if $\sum \lambda_i > \mu$ where λ is arrival rate over some interval, μ service rate of output link
- *almost* like automobile traffic congestion
- rerouting is **not** the problem!

Internet Performance Problems

- packet delay
- delay *jitter* = variation in packet delay
- packet loss if buffers overflow
- for TCP: throughput variations in time and space: bytes/s \rightarrow MB/s
- end-system “congestion” \approx network congestion, but single system!

August 12, 2001


Web Performance Problems

Huitema (Telcordia), Keynote:

- 20% of web page retrievals fail
- *commercial* web page up time of 90-99%
- 15% of HTTP GET > 10 seconds – many per page!
- DNS: 13%, transmit: 42%, connect: 12%, prepare: 33%

August 12, 2001

Delay

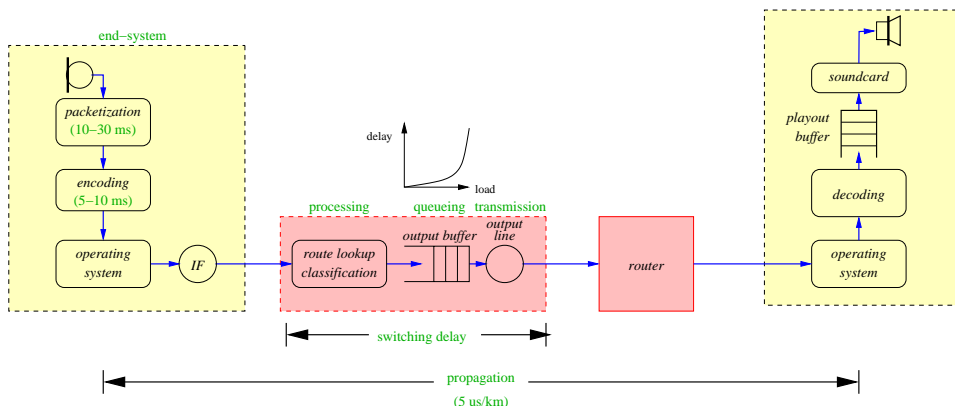

August 12, 2001

Packet Loss: Impact

- TCP: retransmission (\rightarrow danger of “congestion collapse”), slow start
- UDP: application-layer retransmit (DNS), audio/video distortion

August 12, 2001

Queueing Systems

- supermarket checkout
- cafeterias, banks: single line vs. multiple lines
- DMV, CU registration, ...
- England
- buffers in routers, operating system
- service discipline: FIFO, LIFO, priority queue, SDF, ...

August 12, 2001

Introduction to Queueing Models

- science and polling has the Gaussian “bell” curve, networks have *Poisson* model
- probability of event occurring per unit time is constant
- events are independent (i.i.d)
- models: phone calls, arrivals to post offices, ...
- Markov model: discrete time, continuous time – *memoryless*
- birth-death model
- Little’s result: $N = \lambda T$, with N = number in system, T = system time (waiting + service)
- also: $N_q = \lambda W$, with W = waiting time

August 12, 2001

Poisson Distribution

- rate of events λ
- exponential interarrival: $P(T < t) = 1 - e^{-\lambda t}$
- $P_k(t) = \frac{(\lambda t)^k}{k!} e^{-\lambda t}$ = probability of k arrivals in time t
- sum of two Poisson distributions = Poisson
- $M/M/1$ queue = Poisson arrivals, exponential waiting, single server
- more generally: $G/G/1/K$ = general arrivals, general waiting time, K buffers
- renewal paradox

August 12, 2001

Queueing Behavior

- for $M/M/1$:

$$T = \frac{1}{\mu - \lambda} = \frac{1/\mu}{1 - \rho} \quad (1)$$

- for $M/G/1$ (Pollaczek-Khinchin formula):

$$\bar{q} = \rho + \rho^2 \frac{1 + C^2}{2(1 - \rho)} \quad (2)$$

- reality is not $M/G/n$: “heavy tails”

August 12, 2001