

# Real-Time Transport Protocol (RTP)


August 12, 2001

## RTP

- protocol goals
- mixers and translators
- control: awareness, QOS feedback
- media adaptation

August 12, 2001

## RTP – the big picture

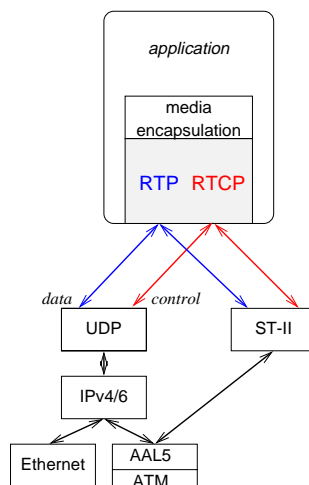

August 12, 2001

## RTP = Real-time transport protocol

- only part of puzzle: reservations, OS, ...
- product of Internet Engineering Task Force, AVT WG
- RFC 1889, 1890 (to be revised)
- initiated by ITU H.323 (conferencing, Internet telephony), RTSP, SIP, ...
- support for functions, but does not restrict implementation
- compression for low-bandwidth networks: CRTP (RFC 2508)

August 12, 2001

## RTP goals

---

**lightweight:** specification and implementation

**flexible:** provide mechanism, don't dictate algorithms

**protocol-neutral:** UDP/IP, ST-II, IPX, ATM-AALx, ...

**scalable:** unicast, multicast from 2 to  $O(10^7)$

**separate control/data:** some functions may be taken over by conference control protocol

**secure:** support for encryption, possibly authentication

August 12, 2001

## Data transport – RTP

---

Real-Time Transport Protocol (RTP) = data + control

**data:** timing, loss detection, content labeling, talkspurts, encryption

**control:** (RTCP)  $\Rightarrow$  periodic with  $T \sim$  population

- QOS feedback
- membership estimation
- loop detection

August 12, 2001

## RTP functions

---

- segmentation/reassembly done by UDP (or similar)
- resequencing (if needed)
- loss detection for quality estimation, recovery
- intra-media synchronization: remove delay jitter through playout buffer
- intra-media synchronization: drifting sampling clocks
- inter-media synchronization (lip sync between audio and video)
- quality-of-service feedback and rate adaptation
- source identification

August 12, 2001

## RTP mixers, translators, ...

---

**mixer:**


- several media stream  $\Rightarrow$  one new stream (new encoding)
- mixer: reduced bandwidth networks (dial-up)
- appears as new source, with own identifier

**translator:**

- single media stream
- *may* convert encoding
- protocol translation (native ATM  $\leftrightarrow$  IP), firewall
- all packets: source address = translator address


August 12, 2001

## RTP mixers, translators, ...

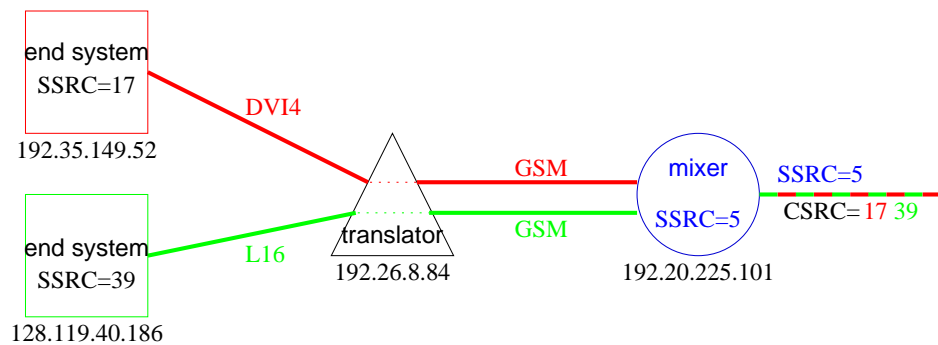

August 12, 2001

## RTP packet header

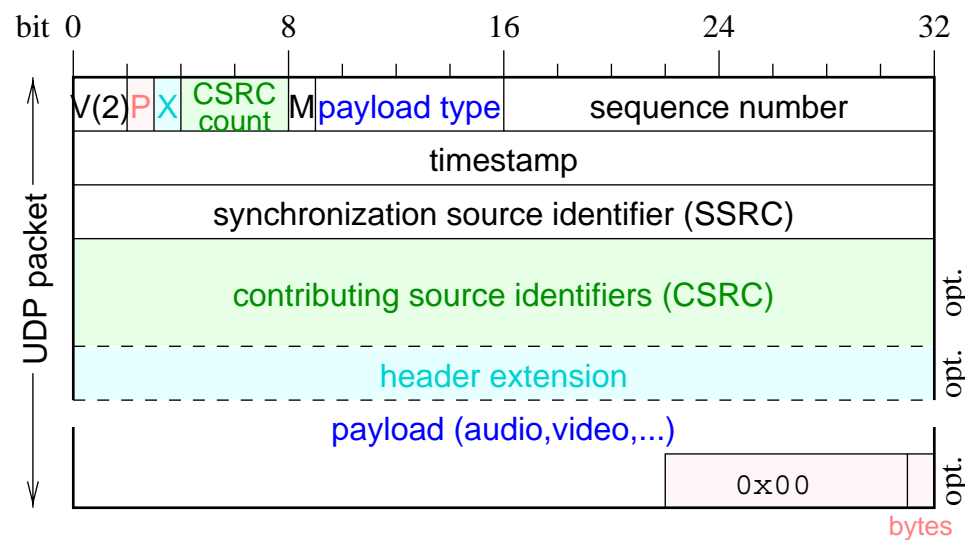

August 12, 2001

## RTP packet header

**Payload type:** audio/video encoding method; may change during session

**SSRC:** synchronization source  $\Rightarrow$  sources pick at random  
 $\Rightarrow$  may change after *collision!*

**sequence number:** +1 each packet  $\Rightarrow$  gaps  $\equiv$  loss

**P:** padding (for encryption)  $\Rightarrow$  last byte has padding count

**M:** marker bit; frame, start of talkspurt  $\Rightarrow$  delay adjustment

**CC:** content source count (for mixers)

**CSRC:** identifiers of those contributing to (mixed into) packet

August 12, 2001

## RTP timestamp

- +1 per sample (e.g., 160 for 20 ms packets @ 8000 Hz)
- random starting value
- different fixed rate for each audio PT
- 90 kHz for video
- several video frames may have same timestamp
- $\Rightarrow$  gaps  $\equiv$  silence
- time per packet may vary
- split video frame (carefully...) across packets
- typical: 20 to 100 ms of audio

August 12, 2001

## RTP in a network

- typical: UDP, no fixed port; RTCP port = RTP port (even) + 1
- typical UDP size limited to few hundred bytes (OS, network, fragmentation)
- native ATM: directly into AAL5 frame
- encapsulation (length field) for others
- typically: one media (audio, video, ...) per port pair
- exception: bundled MPEG

August 12, 2001

## RTP control protocol – types

stackable packets, similar to data packets

**sender report (SR):** bytes send  $\Rightarrow$  estimate rate;  
timestamp  $\Rightarrow$  synchronization

**reception reports (RR):** number of packets sent and expected  $\Rightarrow$  loss, interarrival  
jitter, round-trip delay


**source description (SDES):** name, email, location, ...  
CNAME (canonical name = user@host) identifies user across media

**explicit leave (BYE):** in addition to time-out

**extensions (APP):** application-specific (none yet)

August 12, 2001

## RTCP packet structure

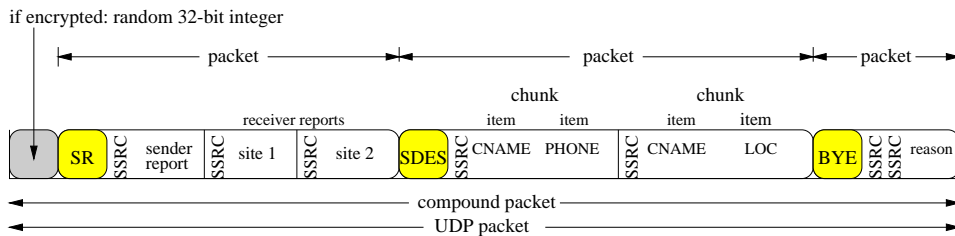

August 12, 2001

## RTCP announcement interval computation

Goals:

- estimate current # & identities of participants – dynamic
  - source description (“SDES”)  $\Rightarrow$  who’s talking?
  - quality-of-service feedback  $\Rightarrow$  adjust sender rate
  - to  $O(1000)$  participants, few % of data
- $\Rightarrow$  randomized response with rate  $\downarrow$  as members  $\uparrow$
- group size limited by tolerable age of status
  - gives active senders more bandwidth
  - soft state: delete if silent

August 12, 2001

## RTCP bandwidth scaling

- every participant: periodically multicast RTCP packet to same group as data
- $\Rightarrow$  everybody knows (eventually) who's out there
- session bandwidth:
  - single audio stream
  - $\sum$  of concurrently active video streams

August 12, 2001

## RTCP bandwidth scaling

- sender period  $T$ :

$$T = \frac{\# \text{ of senders}}{0.25 \cdot 0.05 \cdot \text{session bw}} \cdot \text{avg. RTCP packet size}$$

- receivers:

$$T = \frac{\# \text{ of receivers}}{0.75 \cdot 0.05 \cdot \text{session bw}} \cdot \text{avg. RTCP packet size}$$

- next packet = last packet +  $\max(5 \text{ s}, T)$  · random(0.5...1.5)
- randomization prevents “bunching”
- to reduce RTCP bandwidth, alternate between SDES components

August 12, 2001

## RTCP sender reports (SR)

**SSRC of sender:** identifies source of data

**NTP timestamp:** when report was sent

**RTP timestamp:** corresponding “RTP time”  $\Rightarrow$  lip sync

**sender's packet count:** total number sent

**sender's octet count:** total number sent

followed by zero or more receiver report

August 12, 2001

## RTCP receiver reports (RR)

**SSRC of source:** identifies who's being reported on

**fraction lost:** binary fraction

**cumulative number of packets lost:** long-term loss

**highest sequence number received:** compare losses, disconnect

**interarrival jitter:** smoothed interpacket distortion

**LSR:** time last SR heard


**DLSR:** delay since last SR

August 12, 2001

## Intermedia synchronization

= sync different streams (audio, video, slides, ...)


- timestamps are offset with random intervals
- may not tick at nominal rate
- SRs correlate “real” time (wallclock time) with RTP ts

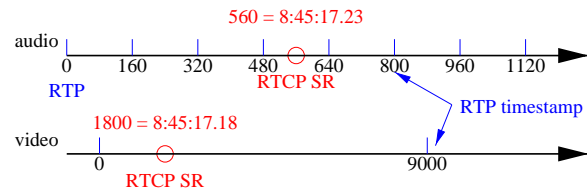

August 12, 2001

## Round-trip delay estimation

compute round-trip delay between data sender and receiver

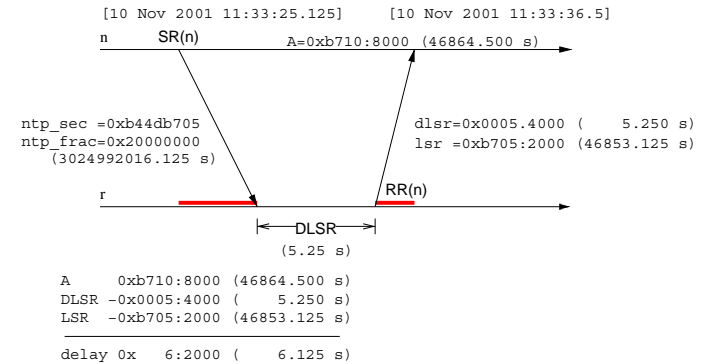

August 12, 2001

## RTP: Large groups

How do manage large groups?

- “movie at ten”
  - channel surfing
- ⇒ reconsideration: pause and recompute interval
- conditional reconsideration: only if group size estimate increases
  - unconditional reconsideration: always
  - reverse reconsideration to avoid time-outs

August 12, 2001

## BYE floods


- avoid BYE floods: don't send BYE if no RTCP
- reconsideration

More general:

- general bandwidth sharing problem
- “squeaky wheel” network management


August 12, 2001

## Reconsideration: learning curve

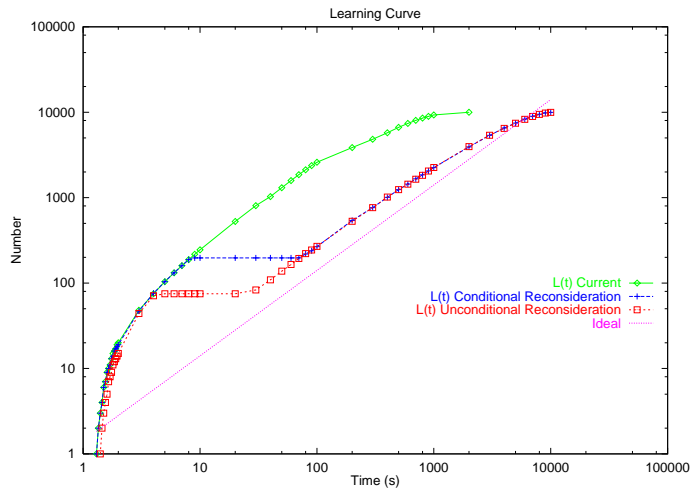

August 12, 2001

## Reconsideration: influence of delay

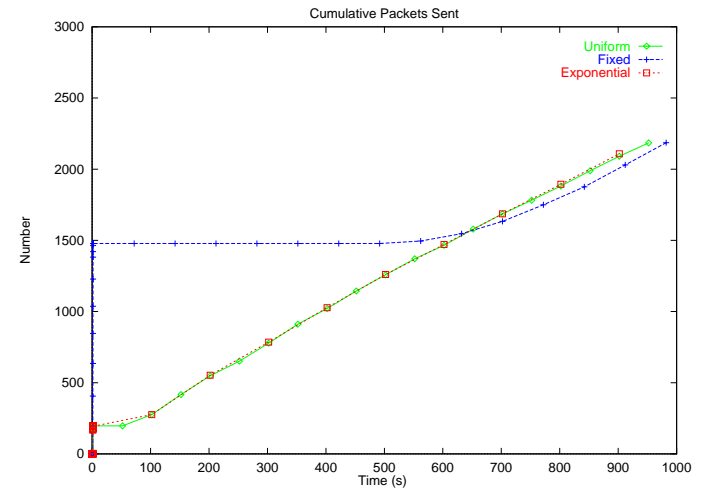


August 12, 2001

## RTP: Aggregation

- interconnected IP/Tel gateways  $\Rightarrow$  several RTP streams to same destination
- high overhead: G.729, 30 ms packetization  $\Rightarrow$  30 bytes audio, 40 bytes IP + UDP + RTP headers
- with ATM: efficiency = 28%
- solution: bundle several calls into single RTP session

August 12, 2001

## RTP: Aggregation

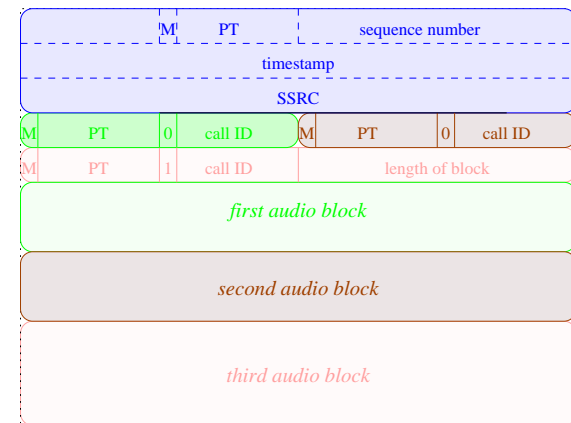

- for 24 channels  $\Rightarrow$  efficiency  $\uparrow$  89%
- signal call-ID using SIP

August 12, 2001

## Collision detection and resolution

---

Collision:

- two sources may pick the same SSRC (“birthday problem”)
- probability: about  $10^{-4}$  if 1000 session members join more or less simultaneously
- but: don’t pick one you know about already  $\Rightarrow$  probability much lower unless everyone joins at the same time
- send BYE for old, pick a new identifier

August 12, 2001

## Loop detection

---

- forward packet to same multicast group (directly or through translators)
- looks similar to collision, but changing SSRC doesn’t help
- look at RTCP packets

August 12, 2001

## RTP for the masses

---

- for 14.4 kb/s stream: 90 B/s  $\approx$  1 new site/s
- takes  $\approx$  3 hours to get to know 10,000 people  $\Rightarrow$ 
  - who cares? (Nielsen!)
  - useless for QOS feedback
  - control rate too high
- $\Rightarrow$  statistical sample (sender determines rate): send value  $[0, 1]$ ; pick random value; if  $<$ , lucky winner  $\Rightarrow$  needs to be adaptive
- $\Rightarrow$  report just to sender, instead of multicast

August 12, 2001

# Adaptive applications

August 12, 2001



## Adaptive applications

Multimedia applications can adjust their data rates:


Audio: encoding parameters (MPEG L3), encoding, sampling rate, mono/stereo

encoding	sampling rate	bit rate
LPC	8,000	5,600
GSM	8,000	13,200
DVI4	8,000	32,000
$\mu$ -law	8,000	64,000
DVI4	16,000	64,000
a range of DVI4 and MPEG L3		
L16 stereo	44,100	1,411,200

August 12, 2001

## Adaptive applications

Video: frame rate, quantization, image resolution, encoding

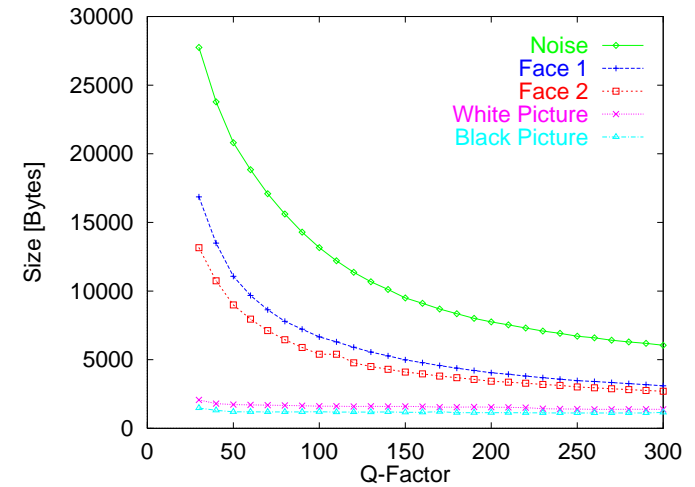

August 12, 2001

## Application control

- networks with QoS guarantees:
  - QoS at call set-up, guaranteed
  - long call durations  $\Rightarrow$  network load may change
  - “wrong” guess  $\Rightarrow$  rejected calls or low quality
- networks w/o QoS or shared reserved link:
  - adapt application to available bandwidth
  - share bandwidth fairly with TCP?
  - lowest common demoninator  $\Rightarrow$  mixers, translators

August 12, 2001

## TCP-friendly applications

- avoid race due to FEC, aggressive retransmission
- push aside TCP applications (sometimes ok...)
- avoid congestion collapse
- avoid being but in “penalty box”
- time scale?

August 12, 2001

## TCP-friendly adaptation

---

- rate computation (e.g.):
  - use additive-increase, multiplicative-decrease
  - use loss/RTT equation: throughput =  $\frac{1.22}{R\sqrt{p}}$ , where  $R$  is the round-trip time and  $p \approx$  loss fraction
- mechanisms:
  - TCP ACKs, without retransmission  $\rightarrow$  overhead, no multicast
  - RTCP RR  $\rightarrow$  delay, metric?

August 12, 2001

## RTP: Status and Issues

---

**Compression:** differential compression for low-speed point-to-point links  $\rightarrow$  compress IP, UDP, RTP into 1–2 bytes

**Aggregation:** trunking of packet streams or Internet telephony gateways

**Large groups:** RTCP feedback for  $O(10,000)$ ; sampling

RTP (RFC 1889, RFC 1890)  $\rightarrow$  draft standard

August 12, 2001

## RTP Header Compression

---

- large overhead for IP + UDP + RTP headers: 40 bytes
- CRTP = lossless differential compression that reduces overhead to two bytes on (low-speed) point-to-point links
- derived from VJ TCP/IP header compression
- context: IP address, port, RTP SSRC
- IP: only packet ID changes
- UDP: only checksum
- RTP: second-order difference of timestamp and sequence number is zero
- resynchronization by NAK  $\rightarrow$  not good for high BER, delay

August 12, 2001

## RTP Header Compression

---


- link layer indicates FULL\_HEADER, COMPRESSED\_UDP, COMPRESSED\_RTP, CONTEXT\_STATE (no IP header)

- differences are encoded as variable-length fields:

-16384	C0 00 00
-129	C0 3F 7F
-128	80 00
-1	80 7F
0	00
127	7F
128	80 80
16383	BF FF
16384	C0 40 00
4194303	FF FF FF

August 12, 2001

## CRTTP Packet Header

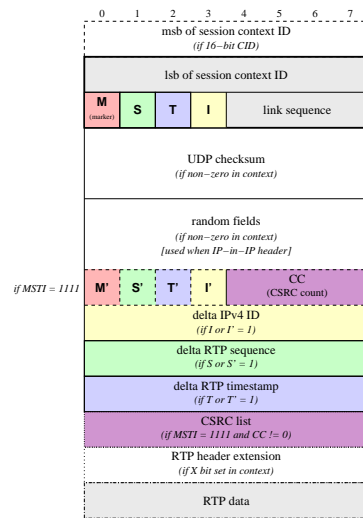

August 12, 2001

## Some RTP Implementations

tool	who	media	RSVP	adaptive
NeVoT	GMD Fokus	audio	yes	not yet
vic	LBNL	video	no	no
vat	LBNL	audio	no	no
rat	UCL	audio	no	no
Rendezvous	INRIA	A/V	no	yes
NetMeeting	Microsoft	A/V	no	no
IP/TV	Cisco	A/V	no	no
RM G2	Real	A/V	no	yes

<http://www.cs.columbia.edu/~hgs/rtp/>

August 12, 2001