

Voice over IP

Henning Schulzrinne
Columbia University, New York
schulzrinne@cs.columbia.edu

©1998-2001, Henning Schulzrinne; updated August 12, 2001

August 12, 2001

Overview

- new Internet services: “telephone”, “radio”, “television”
- why Internet telephony?
- why not already?
- Internet telephony modalities
- components needed:
 - audio coding
 - data transport
 - quality of service – resource reservation
 - signaling
 - PSTN interworking: gateway location, number translation

August 12, 2001

New Internet services

- tougher: replacing dedicated electronic media
- distribution media: hard to beat one antenna tower for millions of \$30 receivers
- typewriter model of development
- radio, TV, telephone: a (protocol) convergence?

August 12, 2001

The phone works — why bother with VoIP?

user perspective

carrier perspective

- | | |
|--|--|
| • variable compression: tin can to broadcast quality | • silence suppression \Rightarrow traffic \downarrow |
| • security through encryption | • shared facilities \Rightarrow management, redundancy |
| • caller, talker identification | • advanced services (simpler than AIN and CTI) |
| • better user interface | • operational advantages |
| • internat. calls: TAT transatlantic cable = \$0.03/hr | • cheaper switching |
| • no local access fees (but \downarrow 1c/min.) | • fax as data |
| • easy: video, whiteboard, . . . | |

August 12, 2001

The new phone companies

- separation bit carriage ↔ services
- anybody with Internet connection can provide services (ACD, 800, 900, directory, ...)
- distinction “in” vs. “out” of network not useful
- incremental start-up investment not large
- new players:
 - cable companies ➡ no new infrastructure, but mostly one-way
 - electric utilities ➡ need line management anyway
 - Qwest, IXC (resell to ISPs), ...

August 12, 2001

Use VoIP – go to jail

Prohibited: Albania, Bahrain, Botswana, Burundi, Cuba, Cyprus, India, Jordan, Kenya, Mauritius, Mexico, Nepal, Pakistan, Panama, Slovakia, South Africa, Thailand, Turkey, Venezuela, Vietnam, Yemen.

Restricted: Hungary (delay > 250 ms), Brazil, China (China Telecom, 4 spin-offs), Czech Republic (not phone-to-phone), Paraguay (fax only), Poland (p2p for mobile operators)

Allowed: Australia, Canada, European Union, Hong Kong, Japan, New Zealand, Peru, Republic of Korea, Singapore, Switzerland, U.S.

(1999 survey)

August 12, 2001

Internet telephony as PBX replacement

If global Internet not quite ready ➡ try as PBX

- have mission-critical LAN, PCs anyway
- usually ample (if switched) bandwidth, low latency
- packet switching is cheaper
- network PCs $\stackrel{\$}{=}$ ISDN phones
- no need for billing

August 12, 2001

Internet telephony services

- voice mail → email
- calendar integration
- user-programmable call processing logic
- call first available sales person (ACD)
- call whole department
- web IVR
- return web page with favorite “on hold” music

August 12, 2001

Internet telephony services

- camp-on without holding a line
- short message service (“instant messaging”)
- schedule call into the future
- call with expiration date
- add/remove parties to/from call → mesh
- “buddy lists”


August 12, 2001

Switching costs

switching method	ports	capacity (Gb/s)	cents/64 kb/s	\$/interface
10/100BaseT Ethernet hub	24	2.40	0.6	10.00
100BaseTX Ethernet switch	24	2.40	0.9	14.60
PBX	256	0.02	218.	140
Lucent 5ESS local (no AIN)	5,000	0.32	469.	300
Lucent 5ESS local (AIN)	20,000	1.28	273.	175
Lucent 4ESS toll	100,000	6.40	7.8	

August 12, 2001

Telephone costs

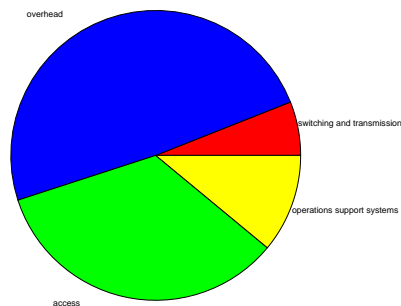

infrastructure	10-23%
switching and transmission	6%
overhead	49%
access	34%
operations support systems	11%

August 12, 2001

Transport costs

network	\$/min	\$/MB
wholesale telephone	0.01–0.02	
U.S. domestic interstate consumer rates	0.05–0.15	
U.S. domestic intrastate consumer rates	0.05–0.25	
modem		0.25 – 0.50
private line		0.50 – 1.00
frame relay		0.30
MCI frame SVC		0.05
Internet		0.04 – 0.15
Internet modem		0.33
Internet backbone		0.01

1' voice = 480 kB w/silence suppr., 1 MB without

August 12, 2001

Phone usage

“Free” phone calls does not mean unbounded increase:

year	lines (millions)	local calls min/day/line	local calls min/day/person
1980	102.2	39	17.5
1988	127.1	39	20.2
1996	166.3	40	25.1

August 12, 2001

Traffic (1998)

Measured in Dial Equipment Minutes (DEM) or bandwidth:

	GDEM	bandwidth (Gb/s)
Local	2986	364
U.S. intrastate toll	422	51
U.S. interstate toll	555	68

PBX: typically, about 10% utilization per phone → 6.4 kb/s per employee (128 Mb/s for 20,000 person campus)

August 12, 2001

Why aren't we junking switches right now?

What made other services successful?

email: available within self-contained community (CS, EE)

web: initially used for local information

IM: instantly available for all of AOL

All of these ...

- work with bare-bones connectivity (≥ 14.4 kb/s)
- had few problems with firewalls and NATs
- don't require a reliable network

August 12, 2001


Why aren't we junking switches right now?

Telephone services are different:

- reliability expectation 99.9% ↗ 99.999%
- PC not well suited for making/receiving calls – most residential handsets are cordless or mobile
- business sets: price incentive minor for non-800 businesses
- services, multimedia limited by PSTN interconnection
- initial incentive of access charge bypass fading (0.5c/min.)
- international calls only outside Western Europe and U.S.


August 12, 2001

Data vs. Voice Traffic

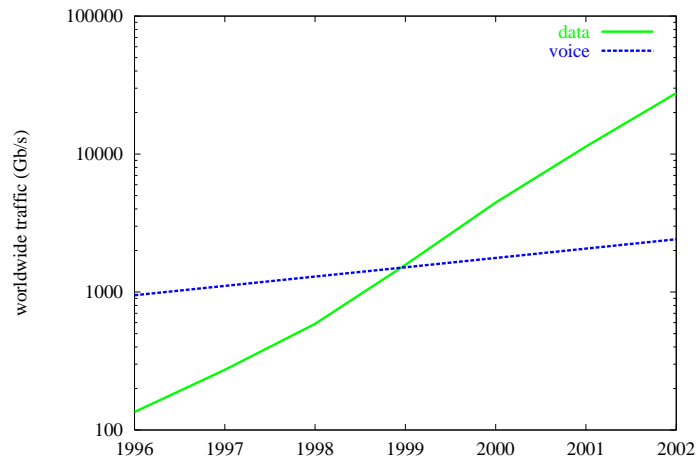

August 12, 2001


Internet multimedia protocol stack

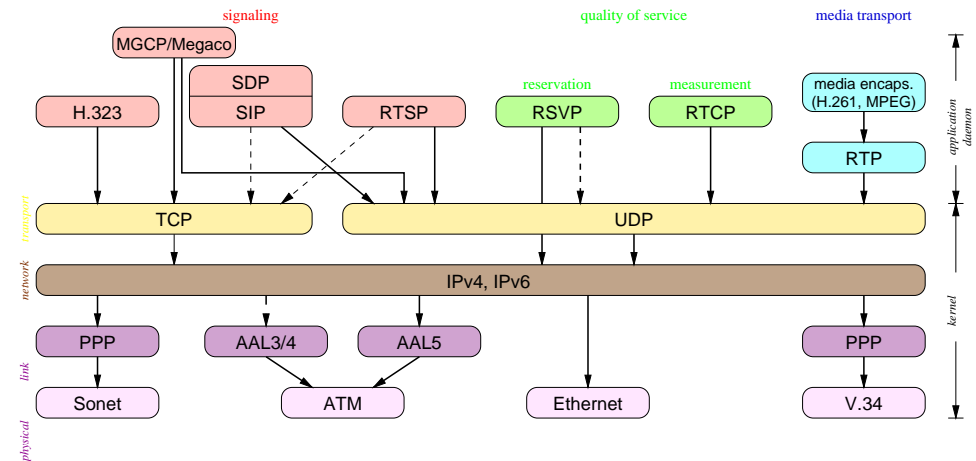

August 12, 2001

Internet telephony modes

- tail-end hop off → callee has phone
- front-end hop on → caller uses phone
- Internet in the middle: per-call, multiplexed

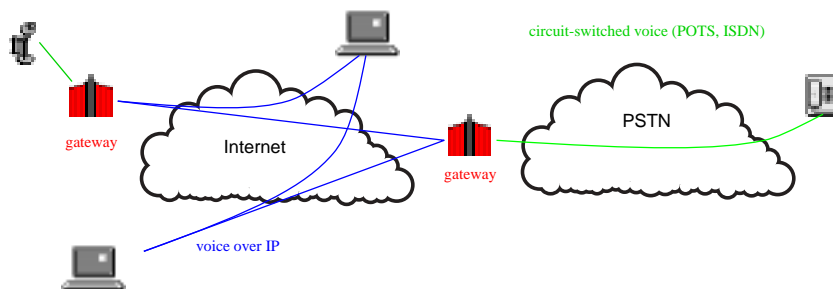

August 12, 2001

Internet “signaling”

all non-data (“out-of-band”) functions:

routing: unicast; DVMRP, PIM, CBT for multicast ✓

quality of service: RSVP, RTCP, diff-serv ✓


user Contact: map name to location (IP address)

call set-up/teardown: SIP, H.323

policy, billing: “vertical” protocols

August 12, 2001

Architecture

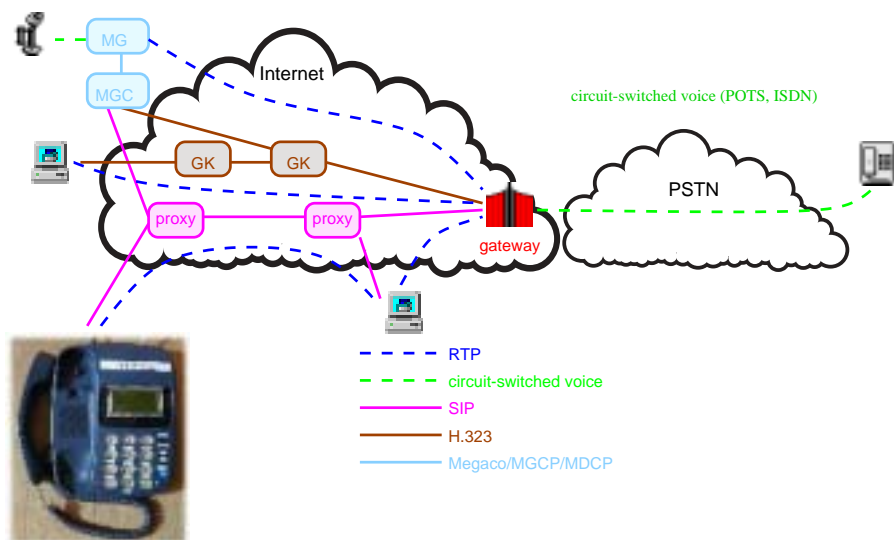

August 12, 2001

Differences: Internet Telephony ↔ POTS

- separate control, transport (UDP) ⇒ no triangle routing
- separate connectivity from resource availability
- separate services from bit transport
- datagram service ⇒ less bootstrapping
- in-band signaling ⇒ higher speed
- features “network” → end system: distinctive ringing, caller id, speed dialing, number translation, ... ⇒ scaling
- features: intra-PBX = international
- protocols: user-network = network-network signaling

August 12, 2001

Two Views of Internet Telephony

Internet telephony:

- primarily voice
- look like phone system: ISDN signaling, separate “stack”
- interoperability with SS7
- or SS7 migration to Internet

Internet telephony:

- VoIP = yet another Internet service
- voice = small fraction of traffic in ten years
- SS7 = legacy, to be relegated to edges
- integration with email, web
- multimedia, including non-CM

August 12, 2001

Architecture

Centrally controlled (master-slave): media gateways controlled by call servers: “connect circuit 17 to IP address 128.59.19.1” → Megaco, MGCP

- all services in server control
- no need to modify end systems
- “pay \$4.59/month for call waiting, \$7.50 for caller id”

Peer-to-peer: equal participants, end-to-end

- services in proxy servers and end systems
- need to modify software for new services
- “download new software for \$19.95”

Connect MGCP islands using SS7 or peer-to-peer protocols

August 12, 2001

Open Operational Issues

- reliability
- billing
- 911 (emergency) services
- wire tapping (CALEA)
- anonymity and certified identity

August 12, 2001

Billing

- simplification: email/web delivery, credit card payment
- what to bill for?
 - transport services:** volume, time, reserved resources; “free upgrades”
 - signaling services:** filtering, forwarding, scripting, mobility, ...
 - storage services:** voice mail
 - gateway services:** PSTN gateways
- difficult: settlements between carriers – not simple LEC – IXC – LEC model

August 12, 2001

Emergency (911) services

- U.S.: dial “911” anywhere → nearest Public Safety Answering Points
- look up street address from telephone company database
- but...
 - IP address dynamically assigned
 - may not be correlated to geography
 - dial-in from hotel, remote sites?
 - prevent services: hanging up, transfer, hold, ...

August 12, 2001

Emergency services

- advantages:
 - multimedia (video, medical data, ...)
 - medical database access, with authentication token
 - remote activation of medical devices
- solutions:
 - enclose (signed) location information with call
 - IP address → provider → lookup (RADIUS) → needs authenticated protocol
 - GPS

August 12, 2001

Lawful intercepts (“wiretapping”)

- Internet already has remote packet tapping: RMON, telnet + rtpdump, ...
- most intercepts done on local loop → Internet doesn't change that
- information services exempt from CALEA provisions
- difference between content and “pen register” (signaling) intercept
- see IETF raven mailing list

August 12, 2001

Other issues

Lots more to talk about (but won't) ...

- carrying ISUP (SS7 signaling) over IP ⇨ SCTP
- using ISUP to set up IP bearers ⇨ BICC
- automatic configuration of IP phones
- (3G) wireless issues

August 12, 2001

Summary

- transition of separate circuit-switched ⇨ IP-based applications
- VoIP: transport + QoS + signaling + services
- packets from the inside out or the outside in?
- **Internet** telephony Or Internet **telephony**
- stack: IP over ATM, Sonet, WDM?
- role of IPv6 or NATs?
- “the end of distance” or tiered IP service?

August 12, 2001